



## Ultra-Far Range Laser

### VLM-635-17-Series

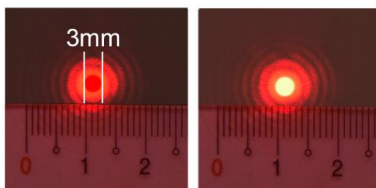

Spot size at 20M

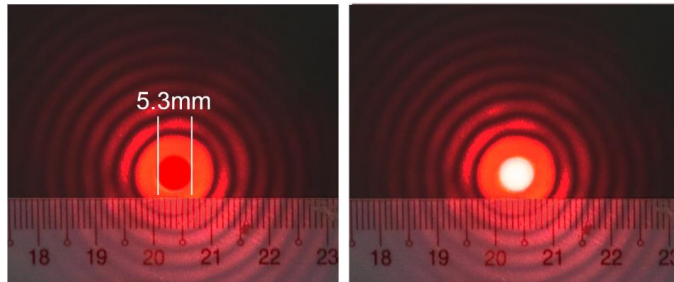

Spot size at 40M

#### FEATURES:


- Ultra-Far Range Round Dot Laser for long range alignment, positioning, measuring and pointing.
- Diffraction Limited Lens to achieve a near-collimated Laser system, which can be sighted Ultra-Far distance range.
- Perfect Round Dot - Ø15mm at 100 meters.
- Anodized aluminum housing provides insulated housing.
- This module has integrated optic, laser diode, and APC driver circuit.
- APC Driver Circuit enables the Laser output power safe and constant.
- Glass-base hybrid lens provides Ultra-Far range Round Dot Laser.
- Dimensions : Ø13 x 50 mm (Ø0.511" x 1.96").
- Wavelength : 630~645 nm
- Laser power output : LPT - Class 2 - 0.7~0.9mW.  
LPA - Class 3R - 2~3mW  
LPB - Class 3B - 5~6mW
- Beam Divergence (Half Angle) : <0.1 mRad
- 3~6 VDC operation.
- Connection type: Lead wire.

#### APPLICATIONS:

- Red Round Dot Laser-glass aspherical lens with long back focus length function to generate smallest spot at long distances. Ideal use for long distance alignment position, surveying instruments, targeting, professional laser sight and security monitor.

## VLM-635-17-Series

### OUTLINE DIMENSIONS (UNITS: mm)

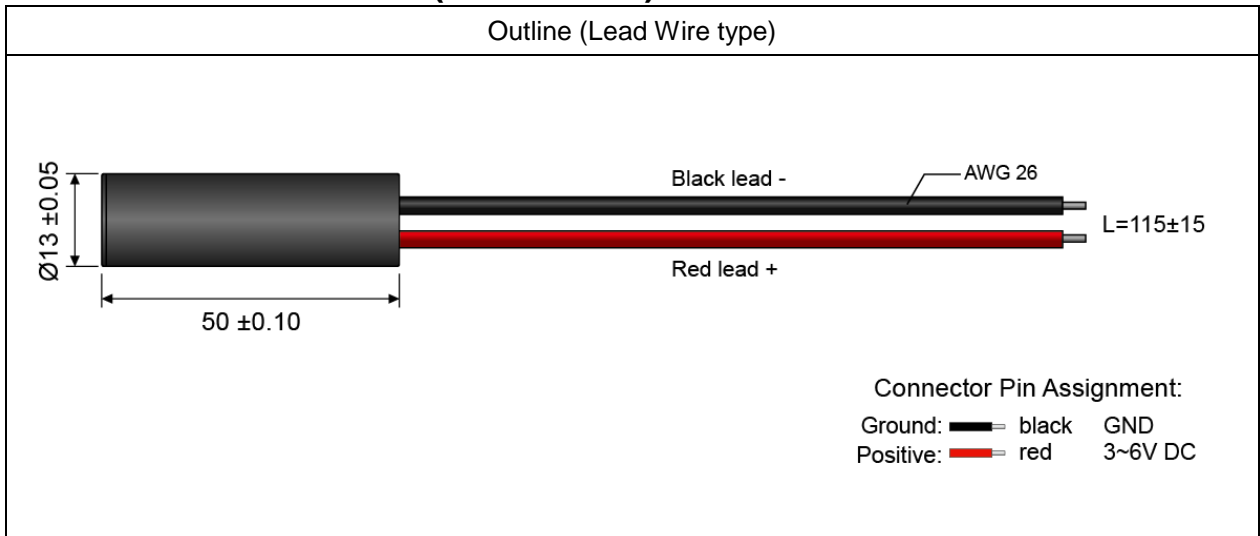


### SPECIFICATIONS

SPECIFICATIONS		VLM-635-17		
		LPT	LPA	LPB
1	Dimensions	$\varnothing 13 \times 50$ mm ( $\varnothing 0.511" \times 1.96"$ )		
2	Weight	<15g		
3	Operating voltage (Vop)	3~6 VDC		
4	Operating current (Iop)	Less than 60mA	Less than 70mA	Less than 85mA
5	Laser power output	0.7~0.9mW	2~3mW	5~6mW
6	Laser class	Class 2	Class 3R	Class 3B
7	Wavelength at peak emission ( $\lambda_p$ )	630~645nm		
8	Collimating lens	Aspherical glass lens		
9	Output aperture	8mm		
10	Beam shape	Circular		
11	Spot size at 40M / 100M	$\varnothing 5.3$ mm / $\varnothing 15$ mm		
12	Beam divergence(Half angle)	Less than 0.1 mRad		
13	Beam alignment*	Less than 3°		
14	Operating temp. range	-10°C ~+50°C		
15	Storage temp. range	-20°C ~+80°C		
16	Housing material	Aluminum		
17	Potential of housing	Insulated		
18	Electrostatic discharge (ESD)	30KV		
19	Moisture sensitivity level (MSL)	Level 1 - acc to JEDEC J-STD-020E.		

## VLM-635-17-Series

20	Protection circuit	Reversed supply circuit protection, over-current protection, surge protection, short circuit protection
21	Vibration resistance	10 to 55Hz, 1.5mm amplitude for 2 hours each in X, Y and Z direction
22	Standard	IEC60825:2014
20	Wire type	1007-26AWG
21	Cable length	115±15mm
22	Mean time to failure (MTTF) 25°C	10000hrs
23	Application	Long range application
24	Suggestion work distance	10~500 meters / 40~2000 feet

\* Beam alignment:

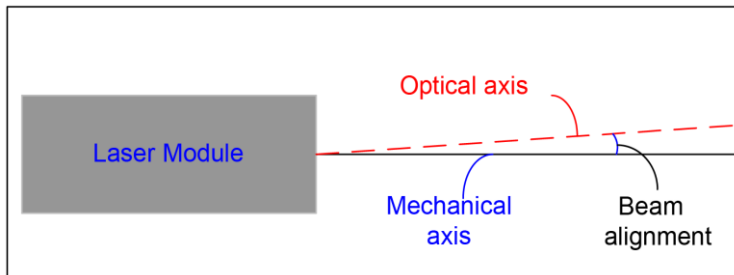

## ORDER CODE

Order Code	Wavelength	Laser Power Output	Laser Class	Connection Type
VLM-635-17 LPT	635 nm	0.7~0.9mW	Class 2	Lead Wire
VLM-635-17 LPA	635 nm	2~3mW	Class 3R	Lead Wire
VLM-635-17 LPB	635 nm	5~6mW	Class 3B	Lead Wire

## SAFETY LABEL

LPT:



LPA:



LPB:

