

Economical 3D-Scan Line module

VLM-650-41 Series



FEATURES:


- Economical 3D-Scan Red Line Laser.
- High contrast Gaussian line profile.
- Line thickness <1.2mm (60° type) at Working Range 50mm ~ 400mm.
- This module has integrated quartz cylindrical lens, collimating lens, laser diode, and APC driver circuit.
- APC circuit to provide maximum stable laser power output.
- Dimensions : Ø10 x 26 mm (Ø0.394" x 1.024")
- Wavelength : 650 nm
- Laser power output : Class I laser product
- Fan Angle : 60° or 90°
- 5 VDC operation.
- Connection type: Lead wire

APPLICATIONS:

- Specifically optimized for consumer grade 3D scanner.
- Red Straight Line Laser, Line-width optimize at short distance (50~400mm), for consumer grade barcode reader, leveling, alignment, adjusting, positioning, measuring and targeting device.
- Wood processing.
- Metal processing.
- Stone processing.
- Textile industry.
- Food industry.
- Automotive industry.
- Medical science.

VLM-650-41 Series

OUTLINE DIMENSIONS (UNITS: mm)

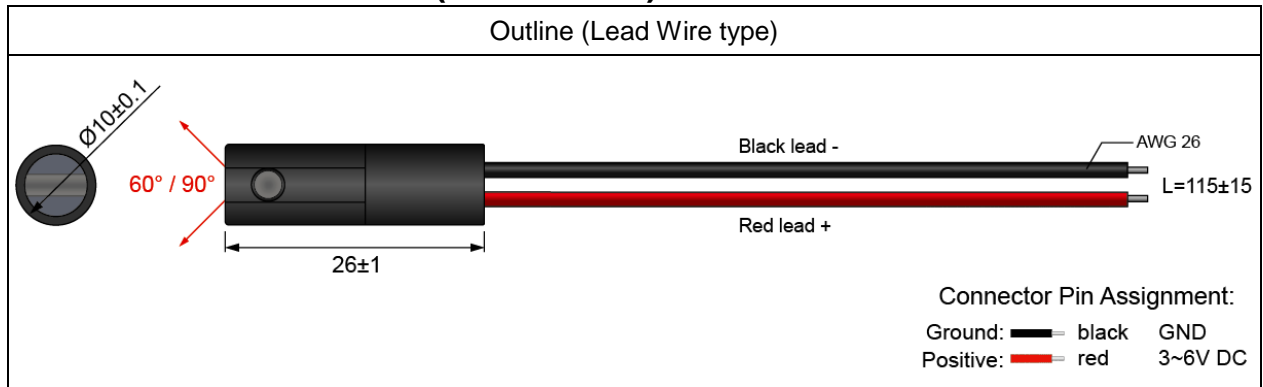

SPECIFICATIONS

SPECIFICATIONS		VLM-650-41 LPT (60°)	VLM-650-41 LPT (90°)	VLM-650-41 LPT30(60°)	VLM-650-41 LPT30(90°)
1	Dimensions	Ø10 x 26 mm (Ø0.394" x 1.024")			
2	Lens Material	Aspherical Plastic + Glass (Rod lens)			
3	Mode of operation	Auto Power Control (APC)			
4	Operating Voltage	3~6V			
5	Modulation	Continuous wave (CW), Switching up to 1KHz			
6	Optical power*	2.5mW	2.5mW	20mW	20mW
7	Laser class	Class I			
8	Output power Stability(25°C)	Total Fluctuation <5%			
9	Output power VS. Temperature	< 0.5% / °C			
10	Wavelength	635~665 nm			
11	Wavelength Stability	0.25~0.3nm / °C			
12	Fan Angle	60°	90°	60°	90°
13	Line Intensity profile	Gaussian Line			
14	Working Range	50mm~400mm			
15	Line thickness (13.5%)	Less than 1.2mm	Less than 1.5mm	Less than 1.2mm	Less than 1.5mm
16	Beam alignment	Less than 3°			
17	Laser line accuracy	1/100			
18	Operating temp. range**	+15°C ~+40°C			
19	Storage temp. range	-20°C ~+65°C			

VLM-650-41 Series

20	Housing Material	Aluminum with Black Anodized
21	Potential of housing	Insulated
22	Electrostatic discharge (ESD)	30KV
23	Moisture sensitivity level (MSL)	Level 1 - acc to JEDEC J-STD-020E.
24	Wire type	1007-26AWG
25	Cable length	115±15mm
26	Application	Precision 3D scanner
27	Suggestion work distance	20~60 cm / 8"~24"

* Optical power is total power output measured at the aperture of the laser.

** Operation temperature means within this temperature range, the laser spot/line will not be affected to change the spot size/line width. It can still work over this range, but the laser spot size or laser line width will be larger.

ORDER CODE

Order Code	Wavelength	Optical power*	Laser Class	Connection Type
VLM-650-41 LPT(60°)	650 nm	Less than 2.5mW	Class I	Lead Wire
VLM-650-41 LPT(90°)	650 nm	Less than 2.5mW	Class I	Lead Wire
VLM-650-41 LPT30(60°)	650 nm	Less than 20mW	Class I	Lead Wire
VLM-650-41 LPT30(90°)	650 nm	Less than 20mW	Class I	Lead Wire

* Optical power is total power output measured at the aperture of the laser.

SAFETY LABEL

CLASS I LASER PRODUCT