

Professional Use Line Laser

VLM-650-37 Series



FEATURES:


- Professional Red Line Laser.
- The supreme line-accuracy and the widest emitting angle line Laser module for use with Professional applications.
- Versatile mechanical structure on 4 sides, easy to fixed.
- This module has integrated quartz cylindrical lens, collimating lens, laser diode, and APC driver circuit.
- APC driver circuit enables the Laser power output safe and constant.
- Aluminum housing with Anodized finish for the best heat transfer consideration.
- Utilize Glass Lens, spot-size maintain tight-dot while temperature fluctuate between -20°C ~50°C.
- Dimensions : (W)14 x (H)14 x (L)26 mm ((W)0.551" x (H)0.551" x (L)1.023").
- Wavelength : 650 nm
- Laser power output level: Class I
- Laser line accuracy: 20" (+/- 1mm @10m)
- Emitting angle: > 120°
- 2.6~6 VDC operation.
- Connection type: Lead wire.

APPLICATIONS:

- Professional Red Straight Line Laser Module, ultra-precision grade for professional leveling, alignment, adjusting, positioning.
- Wood processing.
- Metal processing.
- Stone processing.
- Textile industry.
- Food industry.
- Automotive industry.
- Medical science.

VLM-650-37 Series

OUTLINE DIMENSIONS (UNITS: mm)

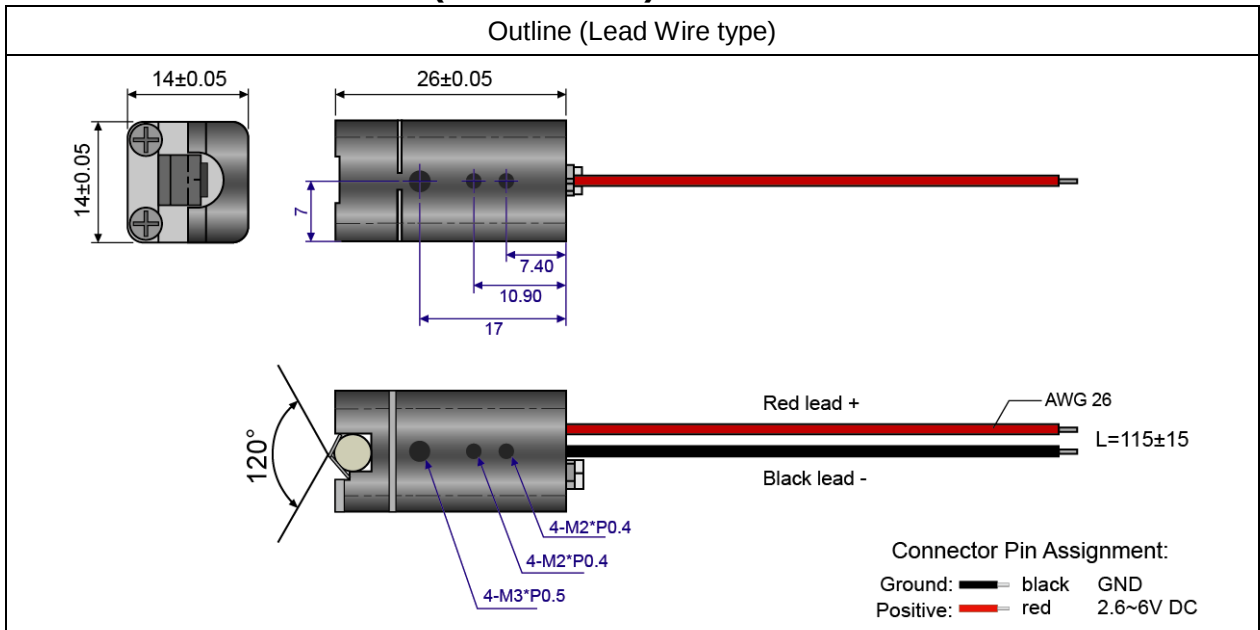

SPECIFICATIONS

SPECIFICATIONS		VLM-650-37	
		LPT	LPT-30
1	Dimensions	(W)14 x (H)14 x (L)26 mm ((W)0.551" x (H)0.551" x (L)1.023")	
2	Weight	11g	
3	Operating voltage (Vop)	2.6~6 VDC	
4	Operating current (Iop)	Less than 35mA	Less than 100mA
5	Optical power*	4~5mW	12~15mW
6	Laser class	Class I	
7	Wavelength at peak emission (λp)	645~665nm	
8	Collimating lens	Glass lens	
9	Line lens	Glass lens	
10	Beam shape	Line	
11	Laser line Width	2±1mm@5m, 4±1mm@10m	
12	Laser line accuracy	20" (± 1mm @10m)	
13	Emitting angle	More than 120°	
14	Operating temp. range**	-20°C ~ +50°C	
15	Storage temp. range	-40°C ~ +70°C	

VLM-650-37 Series

16	Housing	Aluminum
17	Potential of housing	Insulated
18	Electrostatic discharge (ESD)	30KV
19	Moisture sensitivity level (MSL)	Level 1 - acc to JEDEC J-STD-020E.
20	Wire type	1007-26AWG
21	Cable length	115±15mm
22	Mean time to failure (MTTF) 25°C	10000hrs
23	Application	Precision industrial alignment
24	Suggestion work distance	1~20 meters / 3~60 feet

* Optical power is total power output measured at the aperture of the laser.

** Operation temperature means within this temperature range, the laser spot/line will not be affected to change the spot size/line width. It can still work over this range, but the laser spot size or laser line width will be larger.

ORDER CODE

Order Code	Wavelength	Optical power*	Laser Class	Connection Type
VLM-650-37 LPT	650 nm	4~5mW	Class I	Lead Wire
VLM-650-37 LPT-30	650 nm	12~15mW	Class I	Lead Wire

* Optical power is total power output measured at the aperture of the laser.

SAFETY LABEL

CLASS I LASER PRODUCT